

## FEATURES OF STIRRERS

From the small, handy mixer up to the mobile mixing station. Our reliable, well made, durable and easy to use EIBENSTOCK mixing range has something for everyone in the plastering, painting and masonry trades. We offer a quick change paddle adaptor with M14 thread for the entire range as an accessory.

## Stirrer EHR 18.1 S Set



max. 120

### The universal stirrer up to 40 kg

#### USE:

- Mixing of building materials with low and middle viscosity, e.g. paint, glue, filler and leveling compounds, tile cement, ready-mixed mortar
- Drywall construction, tiler, painter and plasterer, civil engineering

#### FEATURES:

- Dust protected electronic switch – stepless speed control for less splashing
- M 14 female direct stirrer connection – effective power transmission, high concentricity
- Cap with labyrinth-guide
- Damping and protection elements

| SPECIFICATIONS       | EHR 18.1 S SET                        |
|----------------------|---------------------------------------|
| Power input          | 1100 W                                |
| Rated voltage        | 230 V ~                               |
| Rated speed          | 0-450 rpm                             |
| No-load speed        | 800 rpm                               |
| Max. basket diameter | 120 mm                                |
| Spindle connection   | M 14 female                           |
| Weight               | 4.1 kg                                |
| Order no.            | 077E1000                              |
| Supplied             | in a box<br>incl. stirring rod WG 120 |

## Stirrer EHR 20.1 R Set



max. 140

### The perfect adjustable stirrer up to 50 kg

#### USE:

- Mixing of building materials with middle and high viscosity, e.g. filler and leveling compounds, tile cement, ready-mixed mortar and plaster
- Drywall construction, plaster, civil engineering, landscaping

#### FEATURES:

- Dust protected switch – soft start for less splashing
- Temperature control
- Stepless speed regulation and constant speed – optimum settings on the material to be mixed
- M 14 female direct stirrer connection – effective power transmission, high concentricity
- Cap with labyrinth-guide
- Damping and protection elements

| SPECIFICATIONS       | EHR 20.1 R SET                        |
|----------------------|---------------------------------------|
| Power input          | 1300 W                                |
| Rated voltage        | 230 V ~                               |
| Rated speed          | 250-580 rpm                           |
| Max. basket diameter | 140 mm                                |
| Spindle connection   | M 14 female                           |
| Weight               | 4.9 kg                                |
| Order no.            | 07742000                              |
| Supplied             | in a box<br>incl. stirring rod MG 140 |






## THE FEATURES OF THE STIRRERS OF THE NEW GENERATION



**Damping and protection elements made of polyurethane** – protection of the machine and the surface in case of unintentional fall

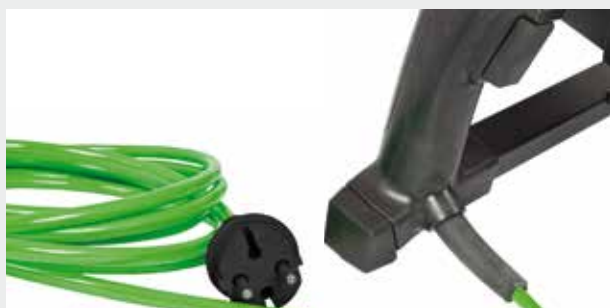

**Dust protected electronic switch, PUR-construction site cable and a protected cable outlet**



**Wide, trapezium design, ergonomic handles and balanced center of gravity** – easy, well balanced guiding of the machine for greater leverage



**Extensions and quick change adapters allow the user to easily change the stirring rod and adapt the stirrer to the users size, without the need for tools.**

