



Concrete Sealers

Decorative Sealers | Cure & Seals | Penetrating Sealers

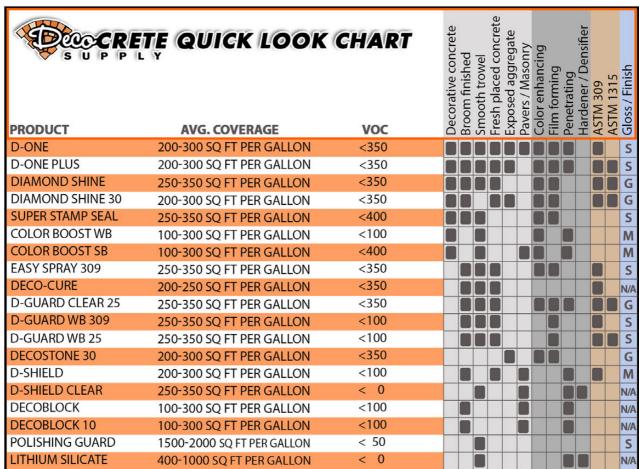




Table of Contents

D-ONE	1
D-ONE PLUS	
DIAMOND SHINE	
DIAMOND SHINE 30	
SUPER STAMP SEAL	
ACRYLIC COLOR PACK	3
REJUVENATOR	
COLOR BOOST WB	4
COLOR BOOST SB	4
POLISHING DYE	5
POLISHING GUARD	5
LITHIUM SILICATE	
EASY SPRAY 309	
DECO-CURE	6
D-GUARD CLEAR 25	7
D-GUARD WB 309	7
D-GUARD WB 25	
DECOSTONE 30 -BROWNTONE	8

BROWNTONE TINT	8
GRAYTONE TINT	
RETARDER - F	
RETARDER -S	8
DEACTIVATOR	
D-SHIELD	10
D-SHIELD CLEAR	10
DECOBLOCK	11
DECOBLOCK 10	11
SOLVENT RETARDER	12
ACETONE	12
XYLENE	12
NOCK OFF	12
CITRUS DEGREASER	12
CONCRETE CLEANER	
CRETE BLAST	13
DECO-PREP	13
DECO GRIP	13
DECO MATTE	13
DLIST DEMOVED	13



*Finish: G= Gloss S= Satin M= Matte N/A= Not Applicable





D-One

- · Non-yellowing, low sheen
- · Siloxane modified methyl methacrylate sealer
- Meets cure & seal specs ASTM C-309Minimizes damage due to water and salt water from de-icing road salts and salt water pool systems
- · Excellent penetration and adhesion to clean, unsealed new or old concrete
- · Coverage: 200 300 square feet per gallon
- · Available in 1, 5 & 55 gallons
- · When spraying D-One use a Chapin Xtreme Sprayer (19049, 19069, 19249 or 22049)



D-One Plus

- · Non-yellowing, medium sheen
- · Siloxane modified methyl methacrylate sealer
- Meets cure & seal specs ASTM C-1315, Type 1, Class A & B
 Minimizes damage due to water and salt water from de-icing road salts and salt water pool systems
- Excellent penetration and adhesion to clean, unsealed new or old concrete
- Coverage: 200 300 square feet per gallon
- Available in 1, 5 & 55 gallons
- When spraying D-One Plus use a Chapin Xtreme Sprayer (19049, 19069, 19249 or 22049)





Diamond Shine

- High gloss, UV resistant acrylic copolymer concrete sealer intended as a cure/cure and seal for all types of concrete.
- Improved resistance to rain, sun, freezing temperatures, stains, and other pollutants that sometimes can be hazardous to concrete.
- It can be considered an ultimate multi-use concrete sealer.
- 250-350 square feet per gallon
- Available in 1, 5 & 55 gallons







Diamond Shine 30

- · High gloss, UV resistant, acrylic copolymer exposed aggregate sealer
- · Clear but can be tinted
- · Best used to seal pea gravel exposed aggregate
- •200-300 square feet per gallon
- · Available in 1, 5 & 55 gallons





Super Stamp Seal

- A medium gloss, non-yellowing, pure acrylic concrete lacquer style sealer designed for decorative concrete.
- Improved resistance to rain, the sun, freezing temperatures, stains, and other pollutants that sometimes can be hazardous to concrete.
- · Coverage: 250 350 square feet per gallon
- · Available in 1, 5 & 55 gallons





Acrylic Color Pack

- A high solids, concentrated, solvent based acrylic tint system specially formulated for solvent based acrylic sealers like Super Stamp Seal & Diamond Shine.
- A semi-transparent stain or a solid opaque colored finish. Decorative way to seal a variety of concrete substrates.
- Recommended for use on unsealed or untreated warehouse floors, garages, basements, docks, driveways, sidewalks and any other concrete surfaces
- •32 oz. container

Rejuvenator

- A strong blend of aromatic and ketone solvents & surfactants
- Melts the heavily coated solvent based acrylic sealer and helps restore the original appearance without adding more acrylic
- · Can be sprayed with an acetone sprayer
- Coverage: 100 200 square feet per gallon
- · Available in 1, 5 & 55 gallons





Color Boost WB

- An active water-based silicone water repellent and impregnating agent for porous masonry surfaces such as concrete, block, brick and unglazed tile.
- · Enhances color without leaving gloss
- · Will not make surfaces any more slippery
- Deeply penetrates surface for maximum water repellency
- · Low volatility and low odor
- Recommended for stamped, colored, broom finish, exposed aggregate, brick & block, pavers, concrete walls, natural & artificial stone, etc.
- Great for pool decks, patios, sidewalks, courtyards, etc.
- Coverage: 100 300 square feet per gallon (dependent on surface porosity and texture)
- · Available in 1, 5 & 55 gallons







Color Boost SB

- An active solvent based silicone water repellent and impregnating agent for porous masonry surfaces such as concrete, block, brick and unglazed tile
- Enhances color without leaving gloss
- · Will not make surfaces any more slippery
- · Deeply penetrates surface for maximum water repellency
- Low VOC compliant
- Recommended for stamped, colored, broom finish, exposed aggregate, brick & block, pavers, concrete walls, natural and artificial stone, etc.
- · Great for pool decks, patios, sidewalks, courtyards, etc.
- Coverage: 100 300 square feet per gallon
- · Available in 1, 5 & 55 gallons



POLISHING & DENSIFYING



Lithium Silicate

- An environmentally friendly, VOC free, lithium silicate concrete floor densifier, hardener and sealer
- Designed to penetrate untreated, bare concrete surfaces providing a permanent glossy, dust proof floor
- UV Stable
- Available in 1, 5 & 55 gallons
- · Coverage: 400-1000 square feet per gallon

Polishing Dye

- A translucent dye, formulated using very fine particles of color designed to penetrate and color interior cementitious surfaces, including polished concrete
- ·To be mixed with 1 gallon of Acetone
- · Available in 1 gallon concentrate
- · Coverage: 400-600 square feet per gallon

Penetrating Agent

- · Improves Dye penetration and mottle effect
- Excellent for high temperature applications
- · Minimizes material waste and surface residue
- 20 ounce bottle (1 ounce per quart of stain, 4 ounces per gallon of stain and 20 ounces per 5 gallons of stain)

Polishing Guard

- Copolymer blend of high gloss sealer and high performance lithium silicate densifier
- Designed to give standard concrete surfaces beautiful sheen while providing improved resistance to stains and increased surface hardness
- · Low Odor
- UV Stable
- · Available in 1, 5 & 55 gallons
- ·Coverage: 1500-2000 square feet per gallon





CURING / SEALING

EasySpray 309

- VOC complaint, UV resistant, low viscosity 15% solids solvent based acrylic copolymer curing and sealing compound
- Can be used as a means of dustproofing most concrete surfaces
- Forms a moisture retentive film on freshly placed concrete
- Meets ASTM C 309 specs
- · Coverage: 250 350 square feet per gallon
- Available in 5 & 55 gallons



Deco-Cure

A clear, water based resin curing compound for concrete. Efficiently cures concrete and then decomposes rapidly when exposed to UV light, sunlight, and abrasion. It is a VOC compliant alternative to solvent based dissipating resin cures.





- Excellent moisture retention for proper curing
- · Protects slabs from construction dirt and stains
- · Economical and easy to apply with standard equipment
- · Milky white during application for gauging proper coverage rate
- Coverage: 200- 250 square feet per gallon
- Available in 5 gallon only



CURE & SEALS

D-Guard Clear 25

- A VOC compliant, low viscosity 25% solids solvent based acrylic copolymer curing and sealing compound, as well as a dust-proofer for concrete surfaces.
- Offers improved resistance to rain, sun, freezing temperatures, stains, and other pollutants that sometimes can be hazardous to concrete.
- Forms a superior moisture retentive film on freshly placed concrete.
- ·When spraying D-Guard Clear 25 use a Chapin Xtreme Sprayer (19049, 19069, 19249 or 22049)
- Available in 5 & 55 gallons





D-Guard WB 309

- A non-yellowing, water-based product designed for curing and sealing applications.
- A penetrating and breathable coating that provides a satin or low gloss finish to a multitude of interior & exterior horizontal or vertical concrete and masonry finishes.
- Self-cross linking, which provides better film formation, early water resistance, adhesion, toughness and outstanding efflorescence and alkali resistance.
- · Available in 5 & 55 gallons

D-Guard WB 25

- Low VOC, low odor, non-yellowing, water-based product designed for curing and sealing applications
- Perfect for low ventilated areas where low VOC's and low odor are required
- Non-yellowing formula assures product's superior resistance to the elements
- · Medium viscosity formula allows for easy application through sprayers
- Superior efflorescence and alkali resistance compared to common solvent based acrylic sealers
- Recommended for interior & exterior freshly placed, finished and aged concrete where a medium gloss water based curing and sealing compound is specified
- Coverage: 250 350 square feet per gallon (New, Unsealed Concrete) & 350 -400 square feet per gallon (Old, Sealed Concrete)
- · Available in 5 & 55 gallons






EXPOSED AGGREGATE

DecoStone 30 - Browntone

- ·Solvent-based, brown tinted acrylic exposed aggregate sealer
- · High gloss
- •350 VOC
- · Designed for application to pea gravel exposed aggregate
- 200-300 square feet per gallon
- · Available in 5 & 55 gallons





Browntone tint - Graytone tint

- 1 pack per pail
- · For Diamond shine & Diamond shine 30
- Browntone makes a translucent tinted sealer to accent the color of exposed pea gravel
- Graytone makes a translucent tinted sealer to accent the color of exposed Limestone
- 4 oz. bottle



Retarder S

- A water soluble liquid specially formulated to retard the surface mortar of fresh concrete to expose aggregates in freshly placed concrete surfaces.
- Green in color to allow for easy identification of applied areas and to ensure appropriate uniform coverage.
- Should be used to achieve architectural color, texture, and appearance without mechanical means such as sandblasting.
- · Available in 1, 5 & 55 gallons

Retarder F

- A green water soluble gel that when applied on the surface of vertical freshly poured concrete retards the surface mortar to expose the aggregate.
- This leaves an architectural finish by exposing the color and texture of the natural aggregate.
- •Coverage: 150 sq. ft. @ 1/8" per gallon
- Available in 1, 5 & 55 gallons



EXPOSED AGGREGATE

Deactivator

- · Makes exposed aggregate finishes easier and more consistent
- It is topically applied to freshly-placed concrete to prevent cement paste hardening and achieve more controlled exposed aggregate finishes
- Unlike sugar-based retarders with uncertain levels of retardation, Deactivator selectively halts the hydration process down to a controlled depth
- 6 predetermined depths of exposure are available, color-coded for identification, to provide consistent, repeatable cement paste removal and aggregate reveal
- Deactivator provides a longer window before the surface paste must be removed, it allows underlying concrete to harden properly, locking in aggregate and reducing pop-outs
- Water-soluble for easy removal with high pressure water washing and scrubbing equipment
- · Coverage: 150 square feet per gallon

Beige - Micro Etch

Purple - Acid Etch - .2mm

Blue - Light Sandblast - 1/64" or .5mm

Green - Heavy Sandblast - 1/16" or 2mm

Red - Exposure - 7/64" or 3mm

Yellow - Exposure - 3/16" or 5mm



Acid Etch O.2 mm Light Sandblast 1/64" or 0.5 mm 1/16" or 2 mm 5 Exposure 7/64" or 3 mm 3/16" or 5 mm



PENETRATING SEALER

D-Shield

- Dual functioning chemical reactive curing compound and water repellent with a low viscosity for better penetration on concrete substrates
- · Will not change the color of the concrete
- Minimizes damage due to water and salt water from de-icing road salts on freshly poured or existing unsealed concrete
- Meets cure & seal specs ASTM C-309, Type 1, Class A
 & B and AASHTO Spec M-148, Type 1, Class A & B
- · Coverage: 200 300 square feet per gallon
- Available in 1, 5 & 55 gallons







D-Shield Clear

- · Water-based penetrating sealer & water repellent
- A reactive, penetrating catalyzed siliconate solution that fuses within porous substrates of concrete, brick, stone, and mortar to combat freeze/thaw damage, scaling and spalling, and limit penetration of stains and damaging impurities such as oil, gas, grease, and salt
- Reduces water absorption into the substrate, thus reducing spalling due to freeze/thaw and efflorescence, thereby increasing the life of the substrate
- Minimizes damage due to water and salt water from de-icing road salts and salt water pool systems
- Excellent penetration and adhesion to clean, unsealed new concrete
- · Will not change the color of the concrete
- Recommended for interior & exterior, concrete pool decks, concrete parking lots, sidewalks, patios and stoops, smooth troweled concrete, broom finish concrete, most other new concrete surfaces where water and salt damaged resistance is required
- · Coverage: 250 350 square feet per gallon
- Available in 5 & 55 gallons



PENETRATING SEALER



DecoBlock

- A 7.5% active water-based siloxane/silane water repellent and impregnating agent for porous masonry surfaces such as concrete, block, brick and unglazed tile
- Excellent resistance to mold, mildew and fungus
- Excellent Water Repellency
- Provides Natural Look
- · Available in 5 & 55 gallons
- · Coverage: 100 300 square feet per gallon

DecoBlock is an active water-based siloxane/silane water repellent and impregnating agent for porous masonry surfaces such as concrete, block, brick, and unglazed tile. DecoBlock will penetrate and chemically bond deep within the substrate to provide long lasting protection against deterioration or staining due to water conditions. DecoBlock will not impair the natural breathing characteristics of treated substrates, nor will it produce a film. DecoBlock will help concrete and masonry surfaces to resist common issues such as cracking, efflorescence, spalling, staining, and other damages caused by intrusion of water.

DecoBlock 10

- A 10% active water-based siloxane/silane water repellent and impregnating agent for porous masonry surfaces such as concrete, block, brick and unglazed tile
- Excellent resistance to mold, mildew and fungus
- Excellent Water Repellency
- Provides Natural Look
- Available in 5 & 55 gallons
- Coverage: 100 300 square feet per gallon





SOLVENTS & CLEANERS

Raw Solvents are used in various aspects of industry. Solvent Retarder, Xylene, and Acetone are used in the paint and coatings manufacturing process. These solvents can be used for many various reasons such as paint and coating clean-up for tools & accessories and coating re-emulsification for the purpose of fixing faulty applications/conditions, etc.



Solvent Retarder

- Use Solvent Retarder for clean up and fixing many issues common with solvent based sealers
- · Slower Drying
- •1, 5, & 55 gallons
- Coverage: Varies



Acetone

- Use Acetone for mixing with Armour Dye & Polishing Dye™ and for clean-up
- · Available in 1, 5 & 55 gallons
- Coverage: Varies



Xylene

- Use Xylene for clean-up and fixing many issues common with solvent based sealers
- 1, 5, & 55 gallons
- Coverage: Varies



Nock Off

- · Roll on biodegradable paint remover
- Removes durable industrial coatings like urethanes & epoxies
- User Friendly and Non-flammable
- Environmentally friendly, does not deplete the ozone
- · Zero VOC product, No carcinogens
- Available in 1, 5 & 55 gallons



Citrus Degreaser

- · Concentrated hard working formula
- Dilute up to 1:10 with clean water
- · Citrus Based Concrete Degreaser
- Biodegradable Formulation
- Quickly Dissolves most kinds of Grease & Motor Oil
- Coverage: Varies



Concrete Cleaner

- · No harsh odors
- Safe for use with scrubbing machines
- Excellent cleaner for daily mopping of sealed or coated surfaces
- VOC compliant for all areas in the U.S. & Canada
- Coverage: Varies



EXTRAS & ADDITIVES



Rust Remover

- Concentrated solution can be diluted up to 1:3 with water
- Safer solution that releases less fumes than similar products
- Removes most rust stains on concrete, pavers, masonry brick
- Coverage: 100 200 square feet per gallon
- Size: 1 gallon Jug



Crete Blast

- Organic, Biodegradable concrete debonding agent and remover
- Non-flammable, non-combustible, non-corrosive, not hazardous
- Perfect for concrete debonding and removal on trucks, mixers, tools, saws, finishing machines
- Coverage: Varies
- Size: 1 gallon Jug



Deco-Prep

- Acid based micro etching solution designed for profiling of unsealed trowel concrete surfaces
- · Slightly opens the pores to allow better acid staining color development and reaction
- · Safe replacement to muriatic acid
- Coverage: 150 250 square feet per gallon
- Size: 1 gallon Jug



Deco Matte



- Matting agent for solvent based acrylic sealer
- · For a satin finish, mix one pint container into a 5 gallon pail of solvent based acrylic sealer
- For a matte finish, mix two pint containers into a 5 gallon pail of solvent based acrylic sealer
- Size: 1 pint

Deco Grip



- Finely ground polymer material for addition to concrete sealers for slip resistance and fine texturing
- Good Chemical & Abrasion Resistance
- Can be added to most film forming coatings
- 16 oz to be mixed into 5 gallons of concrete sealer
- Available in 40, 60 & 100 grit



The Mission: Showing our appreciation by providing veterans a backyard makeover.

www.patiosforpatriots.org



For a list of all up coming training events visit

www.deco-cretesupply.com







High Performance Coating Systems Epoxy | Urethane | Polyaspartic





POLY ARMOUR

/IQUID/METALS



HIGH PERFORMANCE COATING SYSTEMS

ELECTRIC EPOXY

Rockin' Benefits

- 100% Epoxy = Extreme Durability
- · Seamless Flooring with no Grout Lines
- · Easy to Clean and Maintain
- Limitless Color Options
- Available in 3 gallon & 15 gallon kit
- · Base coat 150 sq ft per gallon
- · Metallic coat 75 sq ft per gallon
- Mix Batio: 2A 1B

Liquid Metals Are Perfect For


- Retail Stores
- Living Spaces
- Office Buildings
- Garage Floors





8 oz by weight to be mixed with a 3 gallon kit of Electric Epoxy







NOVEMBER RAIN





FADE TO BLACK







THUNDERSTRUCK







PARADISE CITY









SWEET EMOTION RIDE THE LIGHTNING

The color samples above are representations only. Test prior to use.



HIGH PERFORMANCE COATING SYSTEMS

URETHANES

Rock Hard Urethane


Rock Hard out performs many similar products on today's market.

- · Low Odor
- •85% solids, low VOC, solvent based urethane
- Single component & recoatable
- Premium hardness and chemical resistance
- · Superior leveling, gloss, and UV stability
- · Coverage: 300-350 square feet per gallon
- Available in 1 gallon jug





- High solids, matte finish, two-component water based aliphatic polyurethane.
- Excellent hardness, abrasion, hot tire, & chemical resistance
- Low VOC, and low odor with multiple uses
- Available in 3 gallon kit, Mix Ratio 2A 1B
- Coverage: 200 300 square feet per gallon







iquid meta

- High solids, high gloss finish
- Two-component water based aliphatic polyurethane.
- · Excellent hardness, abrasion, hot tire, & chemical resistance
- · Low VOC, and low odor with multiple uses
- Available in 1.25 & 2.5 gallon kit, Mix Ratio 4A 1B
- · Coverage: 200 300 square feet per gallon



HIGH PERFORMANCE COATING SYSTEMS

CRACK REPAIR

Quik Fix Filler

- Rapid set time allows for minimal down time allowing the user to offer quick return to service
- · Works well even in cold climate applications
- · Ultra low viscosity formula allows for easy application
- Coverage varies
- · Available in 1 gallon and 2 gallon kit
- · Mix Ratio 1A 1B









CrackBond

- Self-leveling, low viscosity system
- Two component, rapid curing, elastomeric, polyurea joint filler
- Treated joints can be opened to traffic in 90 minutes at 75 F
- · Acceptable for use in USDA inspected facilities
- $\bullet\,100\%$ solvent free system with zero VOC content
- Keeps joints free of debris & provides a continuous surface for weight loading
- · Wide application and service temperature range, including freezer applications
- Can be covered with primer/topcoat for aesthetics, but strict instructions must be followed
- Available in a 9oz or 22oz tube



COMMERCIAL & INDUSTRIAL RESINOUS FLOORING

PELYARMEUR

HIGH PERFORMANCE COATING SYSTEMS

The quickest, most immediate way to create an attractive yet durable floor in most situations. Solid color or broadcast, it`s the preferred choice of contractors for saving time and labor while providing that sought after combination of strength and beauty.



Poly Armour Clear 90

- Low Odor Formula
- Lomger Pot Life
- · Crystal clear high performance sealer
- · Durability unrivaled by other top coats
- Excellent Abrasion & Chemical Resistance
- *90 200 300 ft2 per gallon*


Poly Armour Clear 70

- Crystal clear high performance sealer
- Durability unrivaled by other top coats
- Excellent Abrasion & Chemical Resistance
- Low Temperature Installation
- *70 200 300 ft2 per gallon*v

POLY ARMOUR Advantages:

- One day installation
- Next day return to service
- · Superior stain & chemical resistance
- UV stable Non yellowing
- No VOC & odor free applications available
- · Mix Ratio: 1A 1B
- Extreme durability
- · Low temperature cure
- No hot tire pick up
- · Available in 2 gallon or 10 gallon kits





- 4. Top Coat
- 2. Prime Coat
- Prenned Concrete

1 = 6

PELYARMEUR

SHORT FILLED 90, 70

Short Filled Kit

- · Provides ultimate abrasion, impact and wear resistance far exceeding many other applications
- · Entire application, in most cases, can be accomplished in just one day
- · Excellent penetrating and bonding capabilities provide many years of durability
- · Highly economical considering the days of labor that can be saved by using a one day application
- · Armour Tint is mixed into Part A of Poly Armour
- · Available in 1.75 gallon or 8.75 gallon kit

ARMOUR TINT™

- · Color Pack for Poly Armour Short Filled Kit.
- A high solids, concentrated, solvent based tint system specially formulated for Poly Armour
- A superior choice to obtain a semi transparent stain or a solid opaque colored finish
- Mixes into Part A of the Poly Armour Short Filled
- 15 popular colors



Armour tint sold separately

70 - 200 - 300 ft2 per gallon

90 -2 00 - 300 ft2 per gallon

*No VOC & odor free available White Light Gray Medium Gray Sun Buff Safety Yellow Off White Buff Taupe Arabian Sand Dark Gray Charcoal Black Canyon Clay Brick Red Tile Red

The color samples above are representations only. Test prior to use.

POLYARMOUR

100% **EPOXY**

100 Epoxy

- A 100% solids, two component, cyclo-aliphatic amine epoxy system with excellent durability including abrasion resistance, chemical resistance & hot tire resistance
- User friendly high performance concrete flooring system.
- Designed for a variety of seamless high build concrete flooring applications
- An excellent coating for auto service centers, warehouses, computer rooms, laboratories, aircraft hangars, cafeterias, exterior tanks and other areas where high performance, abrasion resistance and chemical resistance are required
- Also an excellent coating choice for interior decorative concrete
- · Available in 3 gallon & 15 gallon kit
- Mix Ratio 2A 1B





COVERAGE RATE: 75 - 125 ft per gallon*

100 Epoxy Tint

- A high solids, concentrated, solvent based tint system specially formulated for Poly Armour 100 Epoxy
- A superior choice to obtain a semi transparent stain or a solid opaque colored finish
- · Mixes into Part A of the Poly Armour 100 Epoxy





The color samples above are representations only. Test prior to use.

POLYARMOUR

PRIMER

Moisture Shield

- A high performance epoxy primer system designed to reduce water vapor transmission
- · Superior adhesion for concrete affected by moisture vapor transmission
- · Excellent base coat for many epoxies and urethanes
- · Performs well where other coatings fail
- · Available in 3 gallon kit
- · Mix Ratio 2A -1B



- 4. Top Coat
- 3. Base Coat
- 1. Concrete



COVERAGE RATE: 200 - 250 ft per gallon* @ 6-8 mils

WB Epoxy

Specially formulated, low odor, two component, water based epoxy primer for interior use. This product provides excellent substrate penetration and is a suitable primer for most epoxies, urethanes, polyureas & polyaspartic polyureas.



- Low viscosity allows for excellent substrate wetting and penetration.
- Provides superior bond to concrete, making it an ideal primer for many other coatings.
- Fast cure times and low odor make this a concrete contractor`s favorite primer.
- Works well as a stand alone, clear epoxy for interior applications.
- · Available in 2 gallon kit
- Mix Ratio: 1A 1B

PELY ARMEUR SPECIALTY PRODUCTS



Floor Flex

- A single component flexible waterproofing membrane that creates a seamless isolation barrier over wood and concrete surfaces
- Can be used as a stand-alone or a flexible underlayment for Deco-Crete coatings & overlays
- Available in 5 gallon pails



Ultra Clear 100

- · Super clear, self leveling countertop epoxy
- · Designed for high build applications where clarity is key
- · Ideal for countertops and specialty projects
- · Mix Ratio: 2A 1B
- · Available in 1.5 gallon kit



MLY FIRM

BROADCAST MEDIA





TINT - SUN BUF

GOLD CREST









BUCKEYE

GAUNTLET GRAY TINT - LIGHT GRAY

Armour Chips

- Vinyl chips & premium mica blends
- · An individual terrazo style finish, that affords owners reduced upkeep with cotntinuing durability

LEATHER

TINT - CANYON CLAY

- Preferred in retail locations, schools and residential garages
- Covers approximately 350 square feet
- · No VOC & odor free available
- •25 lb. Box









SILVER SHADOW TINT - LIGHT GRAY



PEBBLE BEACH TINT - BUFF



GRANITE TINT - MEDIUM GRAY



RIDGE VIEW TINT - CANYON CLAY



NATURAL BEIGE TINT - BUFF



STREAM WOOD TINT - CANYON CLAY

Quartz Blend

- Composed of the finest uniformly shaped and sized quartz granules.
- This unique product is brilliantly color-coated with a superior resin system and high-quality colorfast pigments to provide optimal durability and extreme performance in the most demanding environments.
- In addition to their superior resilience to harsh chemicals and UV rays, Colored Quartz Aggregates can be applied to achieve many different textures and levels of slip resistance.
- 50 lb Bag

PELYARMEUR

DYE & ADDITIVES



Armour Dye

A translucent, U.V. stable dye, formulated using color designed to penetrate exterior and interior cementitious surfaces.

- Create the look of a beautiful, custom acid stained floor in about 1/3 of the time.
- · Available in half gallon or 2 gallon concentrate
- Coverage: 400-600 square feet per gallon



Penetrating Agent

- Improves Armour Dye penetration and mottle effect
- Excellent for high temperature applications
- Minimizes material waste and surface residue
- •20 ounce bottle (1 ounce per quart of stain, 4 ounces per gallon of stain and 20 oz per 5 gallons of stain)





Armour Guard

- Poly Armour Anti-Scratch Additive
- Mixes with Part A of a 2 gallon kit Poly Armour
- · Dramatically increases abrasion resistance
- · Does not impair clarity of clear coatst
- 1 pint container

Armour Grip

- Anti-Skid Coating Additive
- Provides Superior Slip Resistance
- · Great for Sealers, Urethanes, Epoxies
- Available in 40, 60 & 100 grit
- 1 pint container



PELYARMEUR

COUNTERTOP KITS

Rock Top WB

- · Clear Gloss finish, water-based urethane
- Two component
- Excellent hardness, abrasion resistance and chemical resistance
- Low VOC, low odor complete concrete countertop sealer
- Kit Size: 40 oz
- · Includes: Base A, Activator B, Pail and Detailed Instruction Sheet









Rock Top WB Matte

- · Clear matte finish, water-based urethane
- Two component
- Excellent hardness, abrasion resistance and chemical resistance
- Low VOC, low odor complete concrete countertop sealer
- · Kit Size: 24 oz

CRETE

 Includes: Base A, Activator B, Mixing Cup, pail and Detailed Instruction Sheet